

# RS232-RS422/485 Serial Converter, LTC100




**LTC100** is a high performance signal converter between RS-232 and RS-422/485 which operates with or without external power source. It supports both half duplex 2-wire RS-485 and full duplex 4-wire RS-422. The LTC100 is also equipped with 15 KV ESD surge protector to protect itself against damage from electrostatic discharge.

## Features

- Max. distance 1.2 km
- Fully compatible with PC serial COM ports
- No external power supply required (port-powered)
- Optional external DC power supply (7~12VDC)
- Built-in surge protector up to 15kV
- RTS auto toggling
- Communication status can be monitored using LEDs
- DIP switch for RS422/485 mode selection
- Max. 10 device connectivity for RS422 multi-drop mode
- Max. 32 device connectivity for RS485 mode

## Exterior

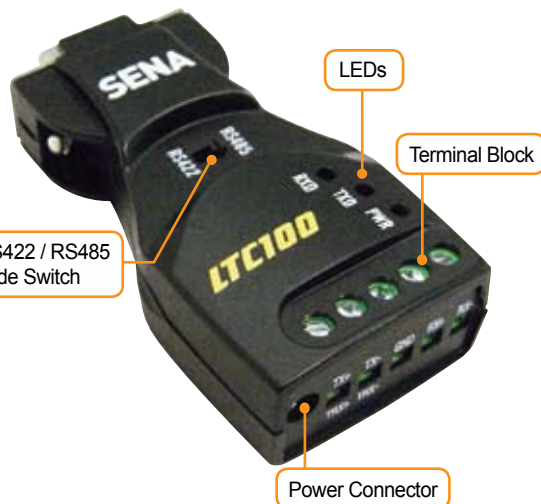

## Ordering Information

### LTC100-01 Includes

- LTC100 : Serial Converter
- User Manual

### Optional Accessories

- GEP0504028 : AC adapter (9V 300mA 3.47PHI for EU)
- GEP0504029 : AC adapter (9V 500mA 3.47PHI for US)

## Specifications

### Serial Interface

- Mode : asynchronous serial communication
  - RS422 mode : point-to-point, multi-drop
  - RS485 mode : echo, non-echo
- Speed : up to 921.6Kbps
- Distance : max. 1.2Km @115.2Kbps,24AWG twisted pair cable
- Connector
  - RS232 : DB9 female
  - RS422/485 : terminal block 5P
- Signals
  - RS232 : TXD, RXD, DCD, DSR, RTS, DTR, CTS, GND
  - RS422 : RXD-, RXD+, GND, TXD-, TXD+
  - RS485 : TRXD-, TRXD+
- Protection
  - 3KV isolation among sides
  - 15KV surge protection for all signals
- Data bits : 5, 6, 7, 8
- Stop bits : 1, 1.5, 2
- Parity : none, even, odd, space, mark
- RTS control : auto toggling

**LEDs** : Power, TX, RX

### Power

- Power input : 7~12VDC
- Power consumption : 0.4W (33mA@12V)

### Environmental

- Operating temperature : 0 ~ 55°C (32~131°F)
- Storage temperature : -20~70°C (-4~158°F)
- Humidity : 5 ~ 95% non-condensing

### Physical Properties

- Dimension : 74(W)x37(H)x19(D)mm
- Weight : 33g

**Certification** : CE, FCC, KCC

**Warranty** : 1-year limited warranty

For more information,  
please visit us at <http://www.sena.com>

### U.S. / Canada / South America

Tel : +1 (408) 573-7425 Fax: +1 (408) 907-3738  
Toll Free (US/Canada): 1-8668-US-SENA (1-866-887-7362)

### EU / Africa

Tel : +33 (0) 1 53 53 16 29 Fax: +33 (0) 1 70 24 70 90

### Asia / Pacific

Tel : +82-2-571-8283 Fax: +82-2-573-7710

### Contact us via E-mail

General Information : [info@sena.com](mailto:info@sena.com)  
Sales & Distribution : [sales@sena.com](mailto:sales@sena.com)  
Technical Support : [support@sena.com](mailto:support@sena.com)

**SENA**  
[www.sena.com](http://www.sena.com)